



07-10-01
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT: JOHNSON, MARK NICHOLAS)

Application No.: 09/864,694)

Filing Date: 05/24/01)

For: MECHANICAL JOINT)

Art Unit: UNKNOWN)

0170
10/2/01
3625
P.H.
#5

RECEIVED

OCT 01 2001

TO 3600 MAIL ROOM

TRANSMITTAL OF PRIORITY DOCUMENT

Director for Patents
Washington, D.C. 20231

Dear Sir:

Enclosed herewith is a certified copy of British Patent Application No. 0012653.2
for which the above-identified patent application claims priority from.


If, for any reason, this priority document is not acceptable, please inform the
undersigned as soon as possible.

Respectfully Submitted

HEAD, JOHNSON & KACHIGIAN

Date: 07/09/01

Customer No. 24,118



Mark G. Kachigian, Reg. No. 32,840
228 West 17th Place
Tulsa, Oklahoma 74119
(918) 584-4187

Attorneys for Applicant

"EXPRESS MAIL" Mailing Label No. EL749342424US

Date of Deposit: July 09, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Director for Patents and Trademarks, Washington D.C. 20231 by Barbara Ladd.





INVESTOR IN PEOPLE

RECEIVED

OCT 01 2001

TO 3600 MAIL ROOM

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 30 May 2001

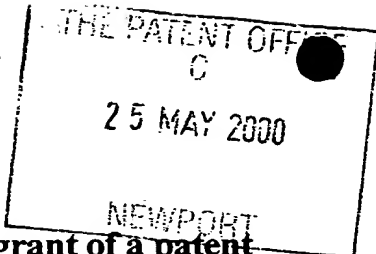

The
Patent
Office

1/77

25MAY00 E539765-5 D00346
P01/7700 0.00-0012653.2

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

| | | | |
|---|---|--|--|
| 1. Your reference | GW-8106-GB | | |
| 2. Patent application number (The Patent Office will fill in this part) | 0012653.2 | | 25 MAY 2000 |
| 3. Full name, address and postcode of the or of each applicant (<i>underline all surnames</i>) | Stage One Creative Services Ltd Briar Rhydding House Otley Road Shipley, W Yorks BD17 7JP U.K. | | |
| Patents ADP number (<i>if you know it</i>) | 7665417001 | | |
| If the applicant is a corporate body, give the country/state of its incorporation | IS | | |
| 4. Title of the invention | Mechanical Joint | | |
| 5. Name of your agent (<i>if you have one</i>) | Bailey Walsh & Co. | | |
| "Address for service" in the United Kingdom to which all correspondence should be sent (<i>including the postcode</i>) | 5, York Place Leeds LS1 2SD | | |
| Patents ADP number (<i>if you know it</i>) | 224001 | | |
| 6. If you are declaring priority from one or more earlier patent applications, give the and the date of filing of the or of each of these earlier applications and (<i>if you know it</i>) the or each application number | Country | Priority application number (<i>if you know it</i>) | Date of filing (<i>day / month / years</i>) |
| 7. If this application is divided or otherwise derived from an earlier UK application, the earlier application | Number of earlier application | Date of filing (<i>day / month / years</i>) | |
| 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (<i>Answer "Yes" if:</i> | Yes | | |
| a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body See note (d) | | | |

RECEIVED
OCT 01 2001
TO 3600 MAIL ROOM

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description 9

Claim(s)

Abstract

Drawing(s) 8 + 8

10. If you are also filing any of the following, state how many of each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(Please specify)

11. I/We request the grant of a patent on the basis of this application

Signature

G Wood

Date

24.05.00

12. Name and daytime telephone number of person to contact in the United Kingdom

G Wood
0113 2433824

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help filling in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in this form you must remember to sign and date it.
- For details of the fee and ways to pay, please contact the Patent Office.

Mechanical Joint

The invention to which this application relates is a mechanical joint which can be used in many possible areas such as, for example, in construction of furniture, exhibition stands, staging and the like.

Conventionally, when an item such as an item of furniture or staging is constructed, at various intervals such as at the corners of the item a series of members are joined together typically by welding. For example, the ends of an end member and side member are abutted against a leg member and welded thereto to form part of the frame construction. In other instances, the leg member can be provided with slots or other engagement means to allow matching engagement means in the end and side members to be engaged therewith but again, typically, some form of welding or other attachment is also provided to ensure that the members stay in the correct position. The use of welding to join the members together means that once the item has been formed, finishing operations are required to reduce the visible impact of the join and smooth the surfaces of the same. However, it is still commonly the case that the attachment technique used is clearly visible and this can detract from the aesthetic appearance of the article and, furthermore, can also restrict the form and construction of the articles.

The aim of the present invention is to provide a mechanical joint which can be used without the need for visible attachment means thereby improving the aesthetic appearance of the articles formed using this type of joint.

In a first aspect of the invention there is provided a mechanical joint for use in the construction of an article, said joint comprising

a first member for connection with a second member, and wherein said first member is provided with at least one aperture having an opening defined by first and second edges, said aperture provided for the reception of the second member, or an insert into which the second member can be attached, and to form the joint, the first and/or second edges of the opening are moved to engage the second member or insert within the aperture.

In one embodiment the first member is provided with a series of apertures formed at spaced intervals and each of said apertures is provided for the formation of a mechanical joint in accordance with the invention.

Typically the second member lies in a plane substantially perpendicular to the plane of the longitudinal axis of the first member.

In one embodiment, the first member is provided in an initial condition in an elongate form and the movement of the first and second edges of the opening of the aperture is about a pivotal axis located in the aperture or adjacent thereto so that the first member, when the joint is formed has relatively angled first and second portions adjacent the joint.

In one embodiment, the aperture is formed so as to extend from one side of the member across the majority of the member to the opposite side leaving a band of material at the opposite side.

In one embodiment, the said first member includes engagement means at intervals, or along the length thereof, to allow the engagement of a further component such as, for example, a table top, decking or the like.

In a further aspect of the invention there is provided a method of forming a mechanical joint, said method comprising taking a first elongate member, forming an aperture depending from one edge of said member, positioning a member or insert in the aperture and then moving at least one portion of the member to move first and second edges of the opening into the aperture towards one another to a degree which is sufficient to prevent the insert or member from passing through the opening.

In one embodiment the first and second edges are respectively moved so as to substantially close the opening and hence retain the member or insert in position in the aperture. In one arrangement the opening may be completely closed by the provision of a closing member and/or weld material.

In one embodiment an insert is provided in the aperture and has upper and/or lower collars formations which protrude above or below the first member. In one form the member positioned in the aperture is a former and is subsequently moved out of the aperture and replaced by an insert which can be held in position or alternatively the member is a second member which is attached via the mechanical joint. In an alternative embodiment, the insert is provided in the aperture and when the first member is moved, as described, the insert is in position so there is no need for a further insert or member to be provided.

If an insert is used, typically it is provided with engagement means to allow the engagement of a second member therewith.

It will therefore be appreciated that a number of these mechanical joints and a number of members can be provided to allow the formation of an item.

In one embodiment, if the item which is formed is for example a table or desk or staging or a stand, the sheet material which forms the table top or stage is formed of a particular shape and at least partially enclosed by at least one member in which the mechanical joints are to be formed. The at least one member is provided with engagement means for the sheet material. In one embodiment, in the formation of the item, the mechanical joints are formed with the sheet material in situ so that the at least one member is formed around the sheet material to take the same shape as the outline of the sheet material.

It should also be appreciated that in some instances, and dependent on the size and form of aperture in the member, the insert or second member which is to be located in the aperture may be of a size or diameter greater than the dimensions of the member in which the aperture is formed so that the mechanical joint has a bulbous form.

In a yet further aspect of the invention there is provided a method of forming a mechanical joint, said method comprising taking a first elongate member, forming an aperture depending from one edge of said member, positioning a former in the aperture and moving at least one portion of the member to at least partially close the opening to an extent which is sufficient to prevent the former from passing through the opening.

In one embodiment the former is removed by sliding the same out of the aperture and replaced by an insert or second member which is positioned to engage in the opening and so engage a second member with the first member directly or via the insert.

In an alternative embodiment the former is an insert which is retained in position and to which the second member is connected

or the former is the second member itself which is trapped in position to form the mechanical joint.

Specific embodiments of the invention will now be described with reference to the accompanying drawings, wherein:-

Figures 1A-H illustrate the method used in the formation of a joint in one embodiment according to the invention;

Figures 2A-B illustrate an embodiment of the joint with a second member attached therewith;

Figures 3A-G illustrate further arrangements of location means for a second member;

Figures 4A-B illustrate one use of a joint arrangement;

Figures 5A-C illustrate embodiments of some articles manufactured using the joint of the current invention.

Referring firstly to Figures 1A-H, there is illustrated a method of forming a joint in accordance with the current invention. There is provided in Figure 1A a member 2 which can be tubular and typically of square or rectangular cross-section or may alternatively be of C-section or any appropriate section to suit the particular use. The material used can also be of any particular form and to suit particular manufacturing requirements and/or finishing appearances. There is formed in the member 2, which is shown in plan, an aperture 4 which has an opening 6 defined by first and second edges 8, 10. The aperture is formed so as to leave a band 12 of material of the member at the edge opposite the opening as illustrated.

Figure 1B illustrates how an insert as shown, former piece or the second member to be attached thereto, is positioned in the aperture 4. In the embodiment shown the insert has a smaller diameter than the width 14 of the member 2 but it should be appreciated that the diameter of the insert could be greater than the width 14 thereby forming a bulbous joint. With the insert 16 in position as shown in Figure 1C, the edges 8 and 10 are, in effect, wrapped around the insert 16 as is illustrated in Figure 1D by the movement of the portions 2A, 2B of the member 2, illustrated by the arrows 20, 22 respectively. It will be seen with reference to Figures 1D through to G that the continued movement of the members 2A, 2B brings the edges 8 and 10 into a position in which they are adjacent one another and in which the walls of the aperture 4 wrap round and take significantly the same form as the outer surface of the insert 16. It should be noted that in normal instances the shape of the aperture will be such as to allow the formation of the aperture when the steps illustrated in Figures 1A-G have been completed substantially matches the outline of the insert 16. Thus the insert 16 can no longer be removed through the opening and the mechanical joint is formed and into which a second member, not shown, can be engaged. The insert 16 includes engagement means with which the second member engages. If required, the edges 8 and 10 can be welded together as illustrated in Figure 1H to close the opening although this may not be necessary in all instances and, it will be appreciated that the position of the weld is such that it will not be readily viewable by onlookers to the article formed using joints of this type. It will therefore be appreciated that the joint formed in accordance with this invention does not require large scale welding or joining of components together and therefore the visual appearance of the joint so formed is greatly enhanced in comparison to conventional joints. Furthermore, there is no need to provide finishing operations on the joint to improve the visual appearance of the same as is the case with conventional joints.

Figures 2A and B illustrate the provision of one embodiment of insert 16 as part of the mechanical joint. The cross sectional view in Figure 2B shows that the insert has upper and lower collars 24, 26 respectively which lie outside of the member 2 and prevent the insert from slipping through the aperture 4, and an outer wall 28 which defines an inner passage 30 which has a frustoconical portion 32. To allow the engagement of a second member 34 with the mechanical joint in this embodiment, the insert is positioned in the joint as described with Figures 1A-H and then the second member 34 is introduced into the insert as indicated by arrow 36 along with an engagement formation 38 which sits in the passage 30 of the insert 16. The engagement means 38 has an annular ring 40 which engages in an indented recess 42 in the second member 34 and thereby engages the second member in the insert via the engagement means 38 as shown. Typically, the second member can be a leg of a table, a desk, seat, shelving unit, staging or the like and in the embodiment of Figure 2A, the second member 34 is engaged with the insert 16 and passes through the joint to form a leg of a shelving system so that the member will be engaged with a number of mechanical joints at spaced intervals there-along, each of the mechanical joints being provided at the location of a shelf.

There are a number of different arrangements of inserts which can be used to suit specific requirements and Figures 3A to G illustrate various embodiments. In Figure 3A, the insert is provided with a threaded passage 48 into which a screw or other threaded engagement means 50 can be entered to engage with a member, not shown, but protruding from the base 52 of the insert. Figure 3B illustrates a split collar form of insert with which a member can be engaged by passing into the aperture 48 passing through the insert. Figure 3C utilises the provision of a grub screw 54 which can be used to engage with a second member 52 on the insert 16. Figure

3D illustrates an arrangement whereby the insert 16 is provided to locate two members 60, 62 with respect to the mechanical joint and to each other by use of matching male and female engagement means 64, 66 and collar section 68 as illustrated. Figure 3E illustrates a similar arrangement to Figure 3D with only one member 62 being located and with a capped engagement portion 70 but utilising the male and female engagement means 64, 66 in a similar manner. Figures 3F and G illustrate similar arrangements to that of Figure 3E.









It will be appreciated that a number of mechanical joints will typically be required to allow the formation of an item and it will also be appreciated that there are number of different embodiments of articles which can be formed using the mechanical joint as herein described

Figures 4A and B illustrate one form wherein a mechanical joint is formed from member 2A, 2B and the member is provided with a C section as illustrated. The mechanical joint in this arrangement is provided to be used to form a table or staging and a portion of the sheet material used to form the table top or stage 72 is illustrated wherein recessed edges 74 are provided which engage in the recess of the C section as illustrated. With the leg 76 engaged in the insert 16 as shown in Figure 4B, it will be appreciated how a number of said mechanical joints at the corners of the item are used to allow attachment of the legs and also, in conjunction with the members 2, allow the engagement of the sheet material 72 and so form the item.

Figures 5A to C illustrate alternative arrangements using mechanical joints, and Figures 5A and B illustrate how relatively unusually shaped items of furniture can be formed. Indeed, in the Figures 5A and B it is possible that the table top 72 can be provided in grooves

along the inner sides of the member 2 and the member 2 formed around the shape of the table top with the joints formed at the same time as the member is shaped. Figure 5C illustrates a more conventionally shaped table and illustrates how the table top is provided to be fitted into a frame formed with mechanical joints in accordance with the invention.

ALL VIEWS IN PLAN ELEVATION
SHOWING SECTION THROUGH

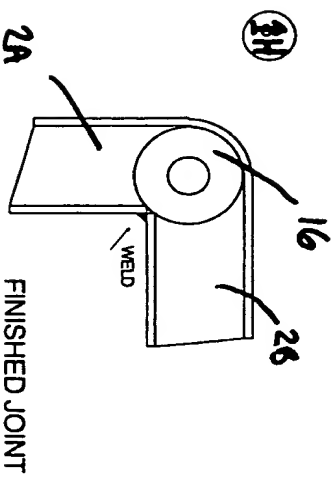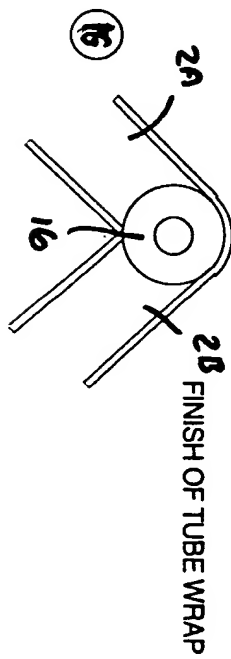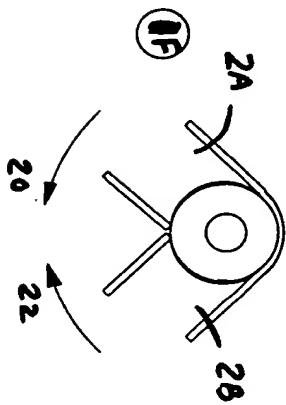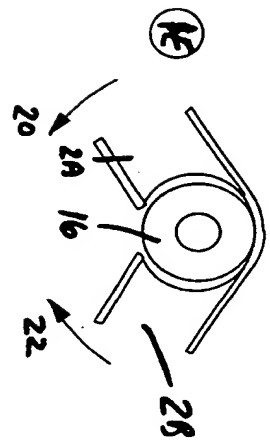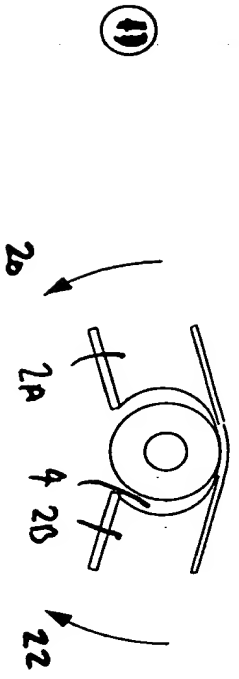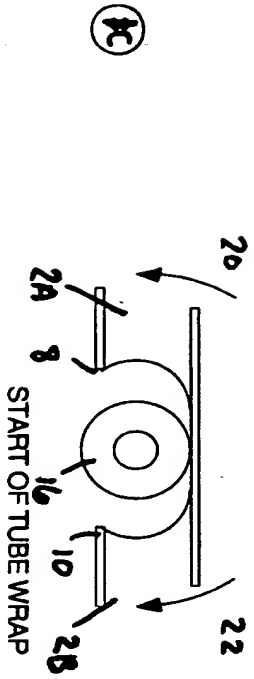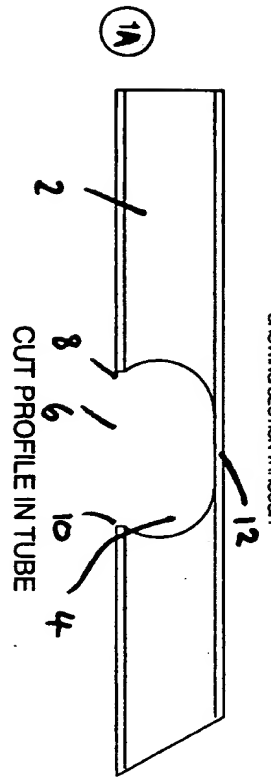

DESIGNER: M. N. JOHNSON

DRW REF: MNJ 001

DRAWN : 30/1/99

TITLE: TUBE WRAP CONCEPT

SCALE: 1 : 1.5


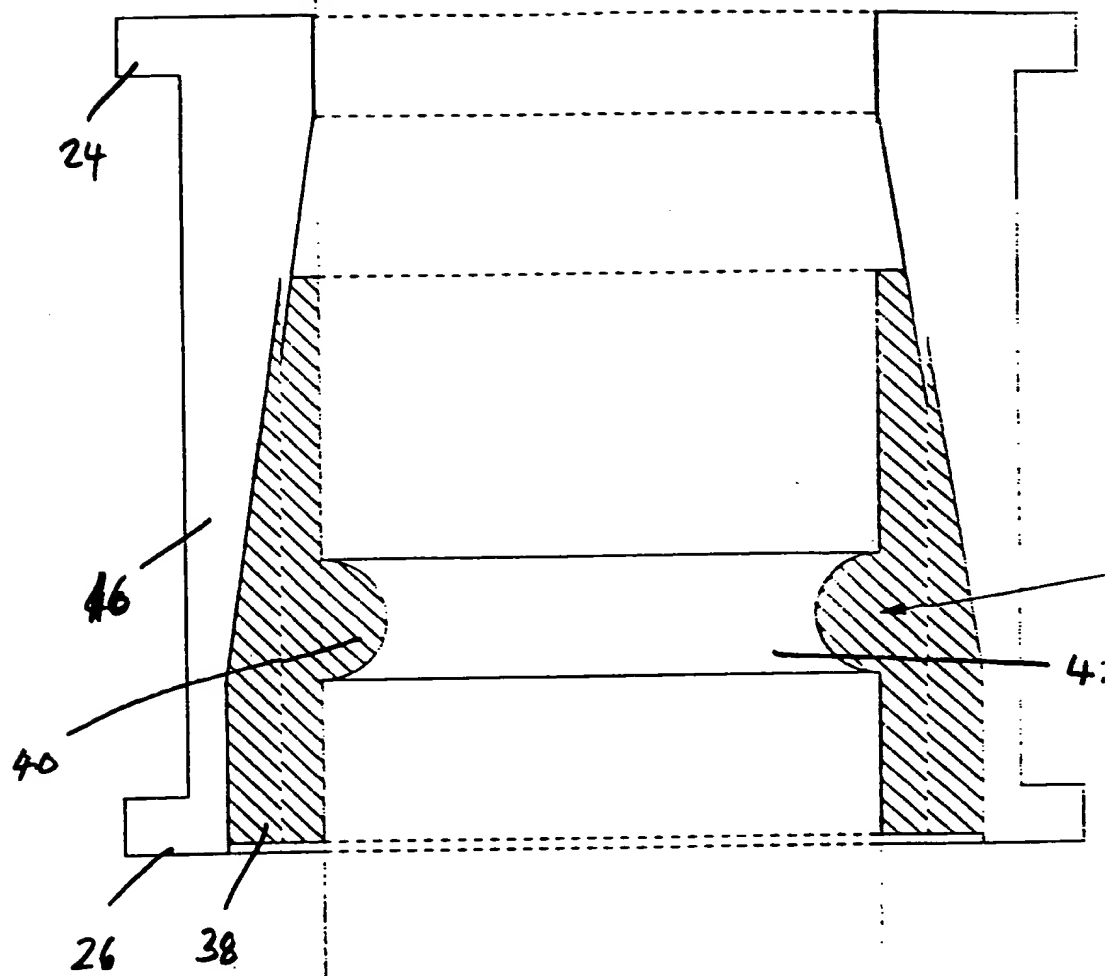


Figure 2A

34

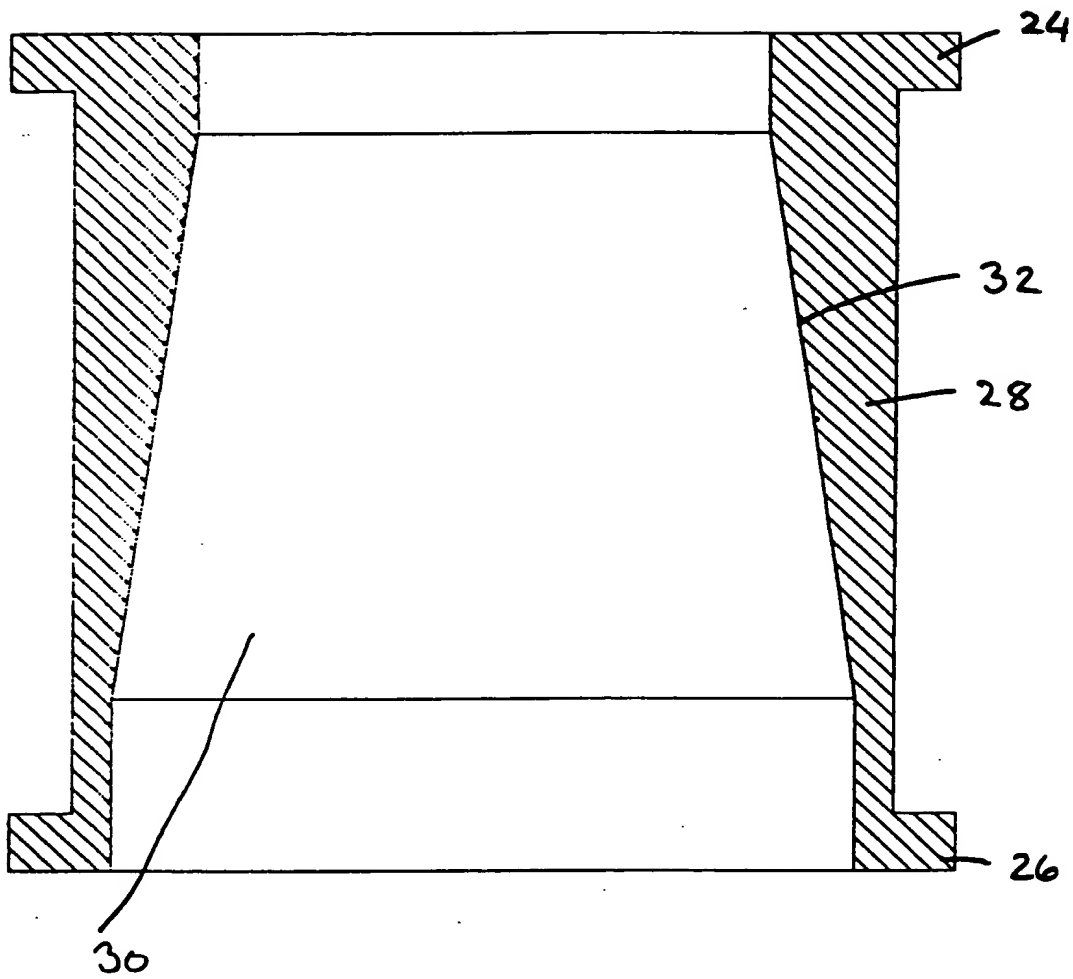

CROSS SECTION OF INSERT

Figure 2B

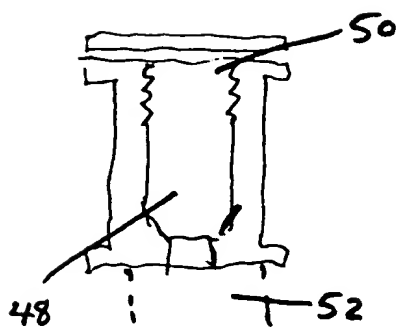


Figure 3A

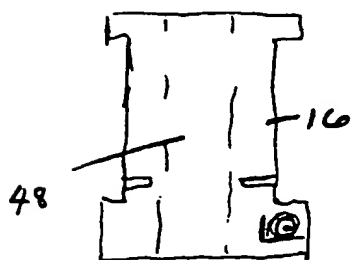


Figure 3B


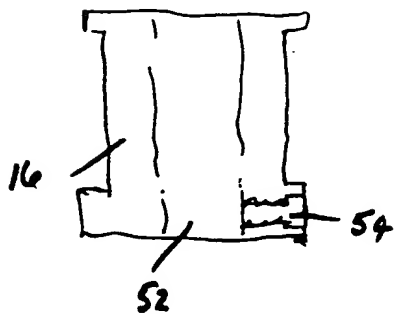
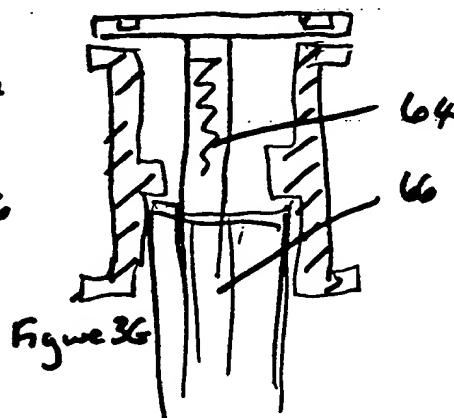
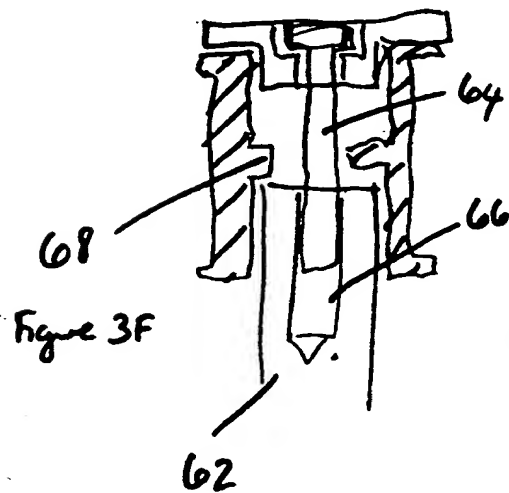
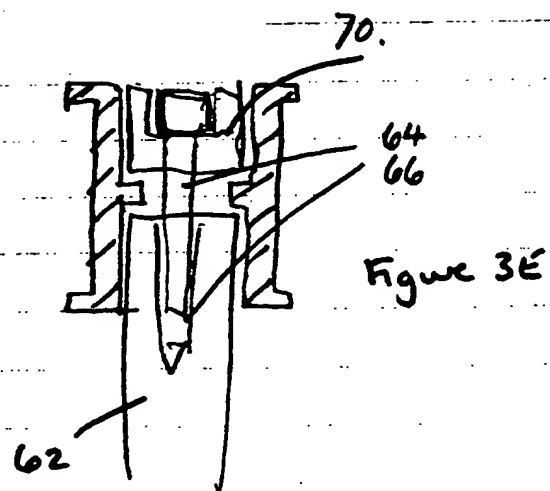
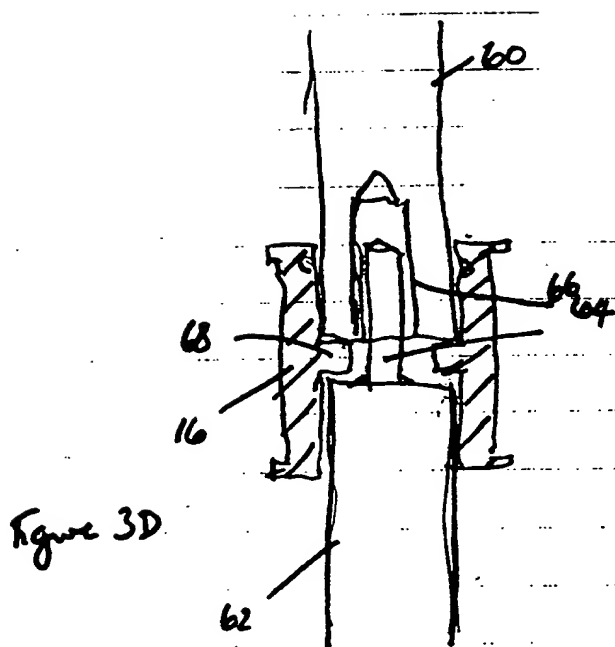


Figure 3C





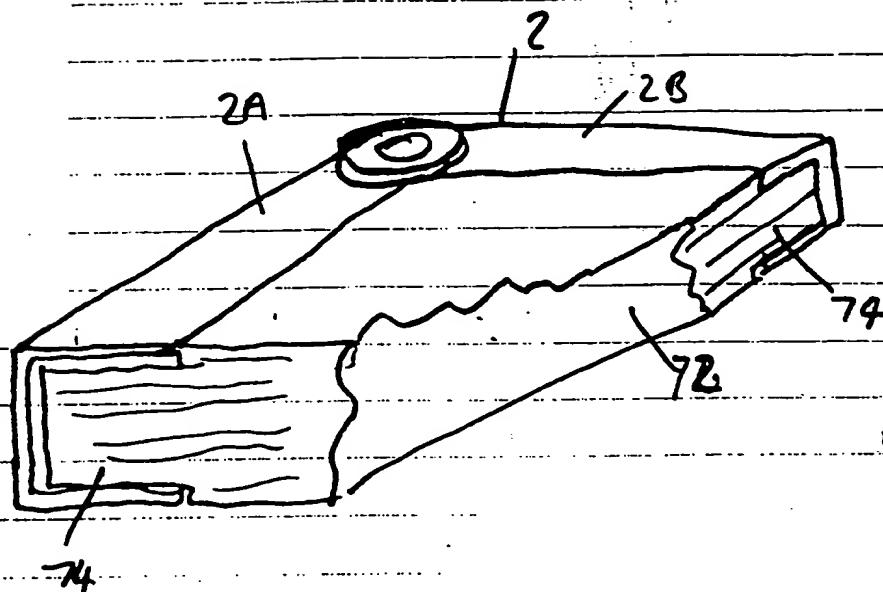


Figure 4A


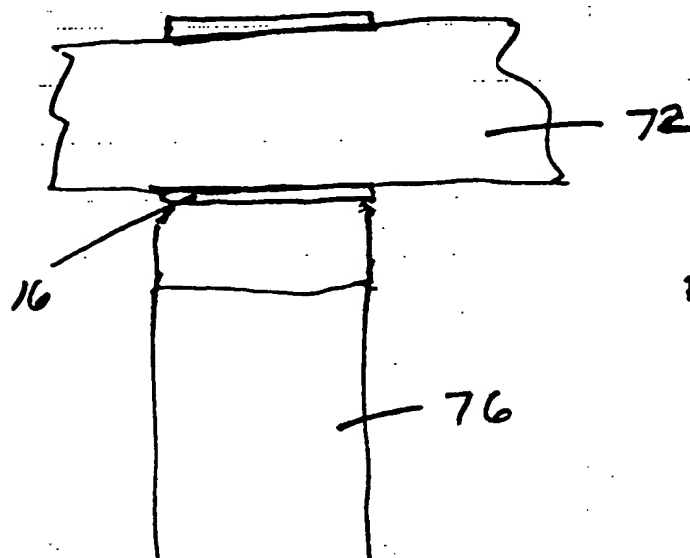


Figure 4B

Page 2


Example (2)

Flexible / Black laminate

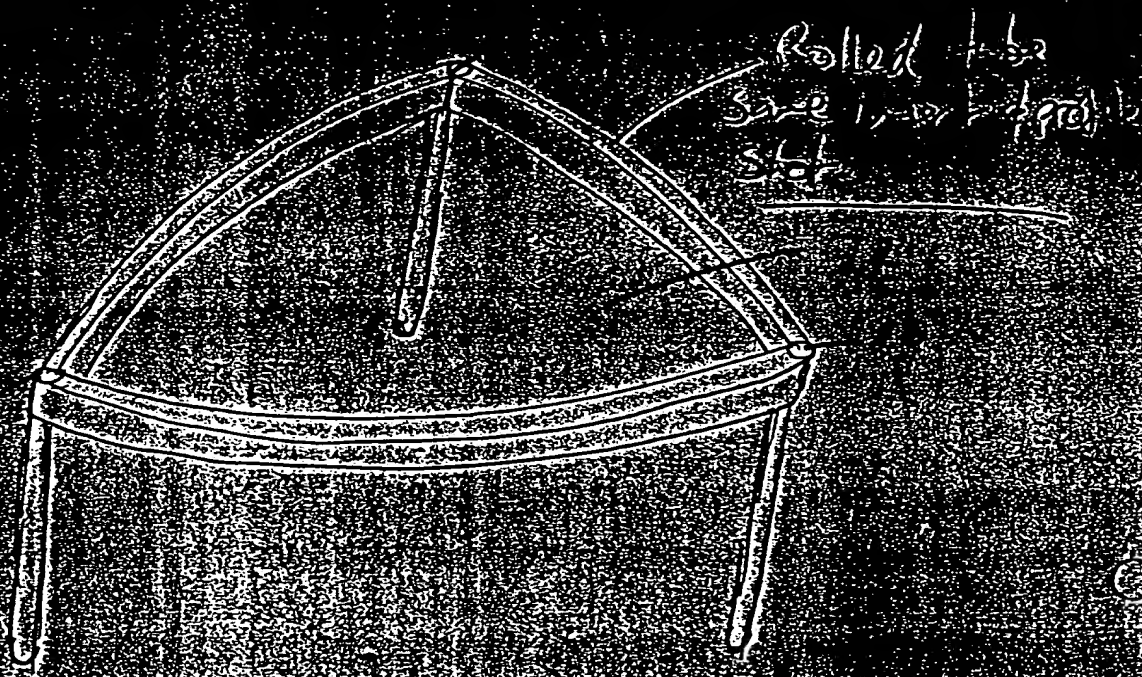

Rolled tube
Size 1-1/2" x 1/2"
Stk

Example (3)

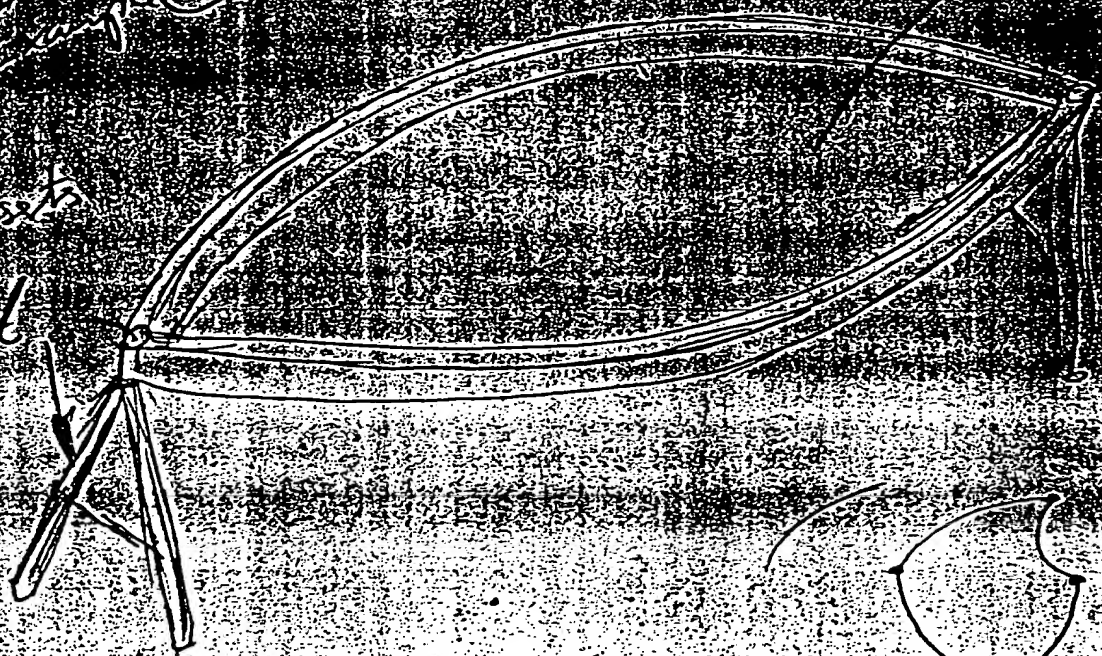


Size 1-1/2" x 1/2"
Diff. leg format



Example 1
Simple table

Jan 92
ml

Suitable top / framed drip
or escape

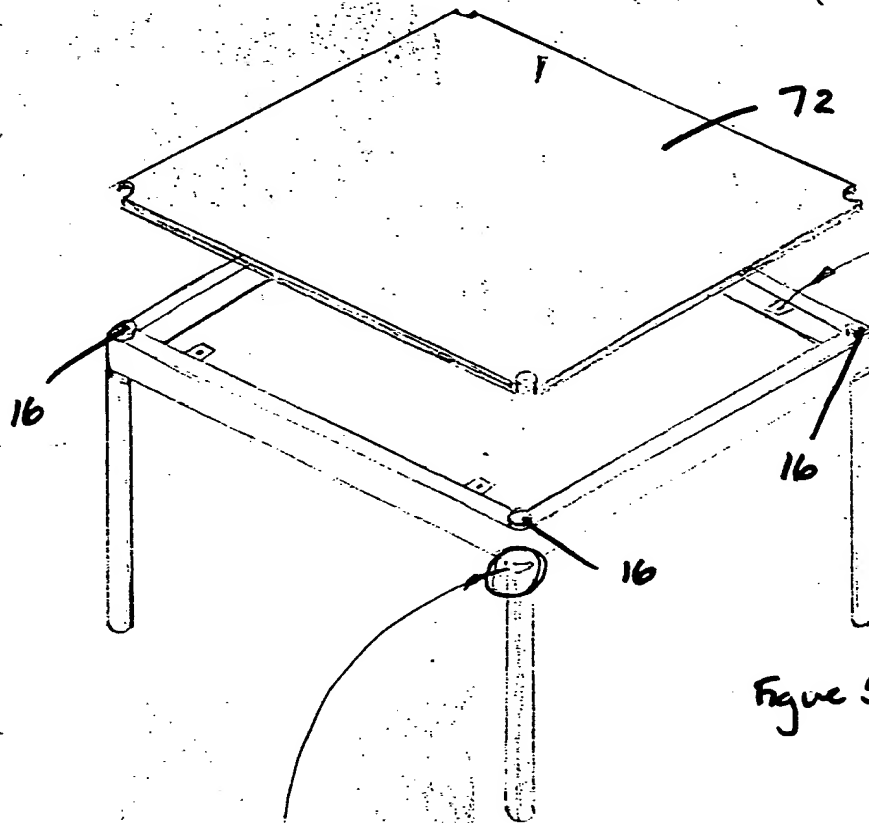

top serving area
(also)

Figure 5c

